

## GASTRONORM CABINET GN 2/1 SERIES

### **GN650 TN**

W×D×H (mm)	740×830×2010
CAPACITY (LITERS)	650
CABINET TEMP.	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.2 KWh/24h
NET WEIGHT (APP.)	134 KG



### **GN650 TN M**

W×D×H (mm)	740×830×2010
CAPACITY (LITERS)	650
CABINET TEMP.	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.2 KWh/24h
NET WEIGHT (APP.)	134 KG



### **GN650 TN G**

W×D×H (mm)	740×810×2010
CAPACITY (LITERS)	650
CABINET TEMP.	0 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.8 KWh/24h
NET WEIGHT (APP.)	138 KG



## GASTRONORM CABINET GN 2/1 SERIES

### **GN650 BT**

W×D×H (mm)	740×830×2010
CAPACITY (LITERS)	650
CABINET TEMP.	-18 ~ -22 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	6.5 KWh/24h
NET WEIGHT (APP.)	138 KG



### **GN650 BT M**

W×D×H (mm)	740×830×2010
CAPACITY (LITERS)	650
CABINET TEMP.	-18 ~ -22 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	6.5 KWh/24h
NET WEIGHT (APP.)	138 KG



### **GN650 BT G**

W×D×H (mm)	740×810×2010
CAPACITY (LITERS)	650
CABINET TEMP.	-18 ~ -22 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	7.3 KWh/24h
NET WEIGHT (APP.)	142 KG



## GASTRONORM CABINET GN 2/1 SERIES

### **GN1410 TN**

W×D×H (mm)	1480×830×2010
CAPACITY (LITERS)	1410
CABINET TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	5.0 KWh/24h
NET WEIGHT (APP.)	198 KG



### **GN1410 TN M**

W×D×H (mm)	1480×830×2010
CAPACITY (LITERS)	1410
CABINET TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	5.0 KWh/24h
NET WEIGHT (APP.)	198 KG



### **GN1410 TN G**

W×D×H (mm)	1480×810×2010
CAPACITY (LITERS)	1410
CABINET TEMP	0 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	5.6 KWh/24h
NET WEIGHT (APP.)	208 KG



## GASTRONORM CABINET GN 2/1 SERIES

### **GN1410 BT**

W×D×H (mm)	1480×830×2010
CAPACITY (LITERS)	1410
CABINET TEMP	-18 ~ -22 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	8.2 KWh/24h
NET WEIGHT (APP.)	208 KG



### **GN1410 BT M**

W×D×H (mm)	1480×830×2010
CAPACITY (LITERS)	1410
CABINET TEMP	-18 ~ -22 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	8.2 KWh/24h
NET WEIGHT (APP.)	208 KG



## GASTRONORM CABINET GN 2/1 SERIES

### GN70 TN

W×D×H (mm)	740×830×2010
CAPACITY (LITERS)	650
CABINET TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.0 KWh/24h
NET WEIGHT (APP.)	142 KG



### GN70 TNG

W×D×H (mm)	740×800×2010
CAPACITY (LITERS)	650
CABINET TEMP	0 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.2 KWh/24h
NET WEIGHT (APP.)	146 KG



### GN70 BT

W×D×H (mm)	740×830×2010
CAPACITY (LITERS)	650
CABINET TEMP	-18 ~ -22 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	6.0 KWh/24h
NET WEIGHT (APP.)	153 KG



## GASTRONORM CABINET GN 2/1 SERIES

### **GN140 TN**

W×D×H (mm)	1480×830×2010
CAPACITY (LITERS)	1300
CABINET TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	4.6 KWh/24h
NET WEIGHT (APP.)	206 KG



### **GN140 TNG**

W×D×H (mm)	1480×810×2010
CAPACITY (LITERS)	1300
CABINET TEMP	0 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	5.0 KWh/24h
NET WEIGHT (APP.)	212 KG



### **GN140 BT**

W×D×H (mm)	1480×830×2010
CAPACITY (LITERS)	1300
CABINET TEMP	-18 ~ -22 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	7.5 KWh/24h
NET WEIGHT (APP.)	223 KG



## CABINET 600 STATIC

### **GN600 TN**

W×D×H (mm)	680×810×2010
CAPACITY (LITERS)	600
CABINET TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	2.9 KWh/24h
NET WEIGHT (APP.)	118 KG



### **GN600 TN M**

W×D×H (mm)	680×810×2010
CAPACITY (LITERS)	600
CABINET TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	2.9 KWh/24h
NET WEIGHT (APP.)	118 KG



### **GN600 TN G**

W×D×H (mm)	680×810×2010
CAPACITY (LITERS)	600
CABINET TEMP	0 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.2 KWh/24h
NET WEIGHT (APP.)	122 KG



## CABINET 600 STATIC

### **GN600 BT**

W×D×H (mm)	680×810×2010
CAPACITY (LITERS)	600
CABINET TEMP	-15 ~ -20 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	4.8 KWh/24h
NET WEIGHT (APP.)	124 KG



### **GN600 BT M**

W×D×H (mm)	680×810×2010
CAPACITY (LITERS)	600
CABINET TEMP	-15 ~ -20 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	4.8 KWh/24h
NET WEIGHT (APP.)	124 KG





## CABINET 1200 STATIC

### **GN1200 TN**

W×D×H (mm)	1340×810×2010
CAPACITY (LITERS)	1200
CABINET TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	5.0 KWh/24h
NET WEIGHT (APP.)	180 KG



### **GN1200 TN M**

W×D×H (mm)	1340×810×2010
CAPACITY (LITERS)	1200
CABINET TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	5.0 KWh/24h
NET WEIGHT (APP.)	180 KG



### **GN1200 TN G**

W×D×H (mm)	1340×790×2010
CAPACITY (LITERS)	1200
CABINET TEMP	0 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	5.6 KWh/24h
NET WEIGHT (APP.)	190 KG



## CABINET 1200 STATIC

### **GN1200 BT**

W×D×H (mm)	1340×810×2010
CAPACITY (LITERS)	1200
CABINET TEMP	-15 ~ -20 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	6.5 KWh/24h
NET WEIGHT (APP.)	190 KG



### **GN1200 BT M**

W×D×H (mm)	1340×810×2010
CAPACITY (LITERS)	1200
CABINET TEMP	-15 ~ -20 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	6.5 KWh/24h
NET WEIGHT (APP.)	190 KG



## CABINET 600 VENTILATED

### **GN600 TNV**

W×D×H (mm)	680×810×2010
CAPACITY (LITERS)	600
CABINET TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.0 KWh/24h
NET WEIGHT (APP.)	126 KG



### **GN600 BTV**

W×D×H (mm)	680×810×2010
CAPACITY (LITERS)	600
CABINET TEMP	-18 ~ -22 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	6.0 KWh/24h
NET WEIGHT (APP.)	130 KG



## CABINET 1200 VENTILATED

### **GN1200 TNV**

W×D×H (mm)	1340×810×2010
CAPACITY (LITERS)	1200
CABINET TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	4.8 KWh/24h
NET WEIGHT (APP.)	185 KG



### **GN1200 BTV**

W×D×H (mm)	1340×810×2010
CAPACITY (LITERS)	1200
CABINET TEMP	-18 ~ -22 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	7.6 KWh/24h
NET WEIGHT (APP.)	190 KG



## CABINET 600 FISH STATIC

### **GN600 TN FISH**

W×D×H (mm)	680×810×2010
CAPACITY (LITERS)	600
CABINET TEMP	0 ~ +5 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	2.9 KWh/24h
NET WEIGHT (APP.)	119 KG



### **GN600 TNG FISH**

W×D×H (mm)	680×790×2010
CAPACITY (LITERS)	600
CABINET TEMP	0 ~ +5 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.2 KWh/24h
NET WEIGHT (APP.)	122 KG



### **GN600 BT FISH**

W×D×H (mm)	680×810×2010
CAPACITY (LITERS)	600
CABINET TEMP	0 ~ -5 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	4.8 KWh/24h
NET WEIGHT (APP.)	124 KG



### **GN600 BTG FISH**

W×D×H (mm)	680×790×2010
CAPACITY (LITERS)	600
CABINET TEMP	0 ~ -5 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	5.0 KWh/24h
NET WEIGHT (APP.)	124 KG



## CABINET 600 FISH VENTILATED

### **GN600 TNV FISH**

W×D×H (mm)	680×810×2010
CAPACITY (LITERS)	600
CABINET TEMP	0 ~ +5 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.0 KWh/24h
NET WEIGHT (APP.)	126 KG



### **GN600 TNGV FISH**

W×D×H (mm)	680×790×2010
CAPACITY (LITERS)	600
CABINET TEMP	0 ~ +5 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.2 KWh/24h
NET WEIGHT (APP.)	128 KG



### **GN600 BTV FISH**

W×D×H (mm)	680×810×2010
CAPACITY (LITERS)	600
CABINET TEMP	0 ~ -5 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	6.0 KWh/24h
NET WEIGHT (APP.)	130 KG



### **GN600 BTGV FISH**

W×D×H (mm)	680×790×2010
CAPACITY (LITERS)	600
CABINET TEMP	0 ~ -5 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	6.0 KWh/24h
NET WEIGHT (APP.)	130 KG



## EURONORM CABINET 600× 400 SERIES

### PA800 TN

W×D×H (mm)	740×990×2010
CAPACITY (LITERS)	737
CABINET TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.6 KWh/24h
NET WEIGHT (APP.)	150 KG



### PA800 BT

W×D×H (mm)	740×990×2010
CAPACITY (LITERS)	737
CABINET TEMP	-18 ~ -22 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	7.0 KWh/24h
NET WEIGHT (APP.)	155 KG



### GE800 BT

W×D×H (mm)	740×990×2010
CAPACITY (LITERS)	737
CABINET TEMP	-18 ~ -22 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	7.0 KWh/24h
NET WEIGHT (APP.)	155 KG



**SERIES CABINET SNACK 400 SERIES  
EXTERNAL S/S. INTERNAL ALUMINIUM**

**SNACK 400S TN S/AL**

W×D×H (mm)	680×710×1915
CAPACITY (LITERS)	429
CABINET TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	2.4 KWh/24h
NET WEIGHT (APP.)	103 KG



**SNACK 400S BT S/AL**

W×D×H (mm)	680×710×1915
CAPACITY (LITERS)	429
CABINET TEMP	-15 ~ -20 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	4.0 KWh/24h
NET WEIGHT (APP.)	110 KG



**SNACK 400 TN S/AL**

W×D×H (mm)	680×710×2010
CAPACITY (LITERS)	429
CABINET TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	2.4 KWh/24h
NET WEIGHT (APP.)	103 KG



**SNACK 400 BT S/AL**

W×D×H (mm)	680×710×2010
CAPACITY (LITERS)	429
CABINET TEMP	-15 ~ -20 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	4.0 KWh/24h
NET WEIGHT (APP.)	110 KG





**SERIES CABINET SNACK 400 SERIES  
EXTERNAL S/S. INTERNAL S/S**

**SNACK 400S TN S/S**

W×D×H (mm)	680×710×1915
CAPACITY (LITERS)	429
CABINET TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	2.4 KWh/24h
NET WEIGHT (APP.)	108 KG



**SNACK 400S BT S/S**

W×D×H (mm)	680×710×1915
CAPACITY (LITERS)	429
CABINET TEMP	-15 ~ -20 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	4.0 KWh/24h
NET WEIGHT (APP.)	115 KG



**SNACK 400 TN S/S**

W×D×H (mm)	680×710×2010
CAPACITY (LITERS)	429
CABINET TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	2.4 KWh/24h
NET WEIGHT (APP.)	108 KG



**SNACK 400 BT S/S**

W×D×H (mm)	680×710×2010
CAPACITY (LITERS)	429
CABINET TEMP	-15 ~ -20 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	4.0 KWh/24h
NET WEIGHT (APP.)	115 KG



## COUNTERS TN GN1/1 CHILLER

### **GN2100 TN**

W×D×H (mm)	1360×700×860
CAPACITY (LITERS)	282
COUNTER TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	2.8 KWh/24h
NET WEIGHT (APP.)	98 KG



### **GN3100 TN**

W×D×H (mm)	1795×700×860
CAPACITY (LITERS)	417
COUNTER TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.0 KWh/24h
NET WEIGHT (APP.)	134 KG



### **GN4100 TN**

W×D×H (mm)	2230×700×860
CAPACITY (LITERS)	553
COUNTER TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.0 KWh/24h
NET WEIGHT (APP.)	153 KG



## COUNTERS BT GN1/1 FREEZER

### **GN2100 BT**

W×D×H (mm)	1360×700×860
CAPACITY (LITERS)	282
COUNTER TEMP	-10 ~ -20 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	6.0 KWh/24h
NET WEIGHT (APP.)	103 KG



### **GN3100 BT**

W×D×H (mm)	1795×700×860
CAPACITY (LITERS)	417
COUNTER TEMP	-10 ~ -20 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	6.5 KWh/24h
NET WEIGHT (APP.)	138 KG



### **GN4100 BT**

W×D×H (mm)	2230×700×860
CAPACITY (LITERS)	553
COUNTER TEMP	-10 ~ -20 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	7.0 KWh/24h
NET WEIGHT (APP.)	155 KG



## COUNTERS TN GN1/1 CHILLER

### **GN2100 TN G**

W×D×H (mm)	1360×700×860
CAPACITY (LITERS)	282
COUNTER TEMP	0 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.0 KWh/24h
NET WEIGHT (APP.)	98 KG



### **GN3100 TN G**

W×D×H (mm)	1795×700×860
CAPACITY (LITERS)	417
COUNTER TEMP	0 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.2 KWh/24h
NET WEIGHT (APP.)	134 KG



### **GN4100 TNG**

W×D×H (mm)	2230×700×860
CAPACITY (LITERS)	553
COUNTER TEMP	0 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.5 KWh/24h
NET WEIGHT (APP.)	153 KG



## COUNTERS GN 1/1 SG-WITHOUT CONDENSING UNIT

### **GN2100 TN SG**

W×D×H (mm)	1220×700×860
CAPACITY (LITERS)	282
COUNTER TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.0 KWh/24h
NET WEIGHT (APP.)	80 KG



### **GN3100 TN SG**

W×D×H (mm)	1655×700×860
CAPACITY (LITERS)	417
COUNTER TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.2 KWh/24h
NET WEIGHT (APP.)	115 KG



### **GN4100 TN SG**

W×D×H (mm)	2090×700×860
CAPACITY (LITERS)	553
COUNTER TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.5 KWh/24h
NET WEIGHT (APP.)	132 KG



## COUNTERS SNACK DEPTH 600 TN CHILLER

### **SNACK2100 TN/600**

W×D×H (mm)	1360×600×860
CAPACITY (LITERS)	228
COUNTER TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	1.8 KWh/24h
NET WEIGHT (APP.)	88 KG



### **SNACK3100 TN/600**

W×D×H (mm)	1795×600×860
CAPACITY (LITERS)	339
COUNTER TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	2.2 KWh/24h
NET WEIGHT (APP.)	125 KG



### **SNACK4100 TN/600**

W×D×H (mm)	2230×600×860
CAPACITY (LITERS)	449
COUNTER TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	2.6 KWh/24h
NET WEIGHT (APP.)	143 KG



## COUNTERS SNACK DEPTH 600 TN CHILLER

### **SNACK2100 TNG/600**

W×D×H (mm)	1360×600×860
CAPACITY (LITERS)	228
COUNTER TEMP	0 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	2.0 KWh/24h
NET WEIGHT (APP.)	88 KG



### **SNACK3100 TNG/600**

W×D×H (mm)	1795×600×860
CAPACITY (LITERS)	339
COUNTER TEMP	0 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	2.5 KWh/24h
NET WEIGHT (APP.)	125 KG



### **SNACK4100 TNG/600**

W×D×H (mm)	2230×600×860
CAPACITY (LITERS)	449
COUNTER TEMP	0 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.0 KWh/24h
NET WEIGHT (APP.)	143 KG



# SET DRAWER



SET 2 DRAWER / 700  
SET 3 DRAWER / 600



SET 2 DRAWER / 700  
SET 3 DRAWER / 600



SET 2 DRAWER FOR BEER





## COUNTER FOR SANDWICH

### **SH2000/700**

W×D×H (mm)	1360×700×1085
CAPACITY (LITERS)	282
COUNTER TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	2.8 KWh/24h
NET WEIGHT (APP.)	125 KG



### **SH2000/800**

W×D×H (mm)	1360×800×1085
CAPACITY (LITERS)	390
COUNTER TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.3 KWh/24h
NET WEIGHT (APP.)	140 KG

### **SH3000/700**

W×D×H (mm)	1795×700×1085
CAPACITY (LITERS)	417
COUNTER TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.3 KWh/24h
NET WEIGHT (APP.)	155 KG



### **SH3000/800**

W×D×H (mm)	1795×800×1085
CAPACITY (LITERS)	580
COUNTER TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.6 KWh/24h
NET WEIGHT (APP.)	164 KG

## PIZZA REFR. COUNTERS

### **PZ2600TN**

W×D×H (mm)	1510×800×1000
CAPACITY (LITERS)	390
COUNTER TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.0 KWh/24h
NET WEIGHT (APP.)	258 KG



### **PZ2610TN**

W×D×H (mm)	2025×800×1000
CAPACITY (LITERS)	580
COUNTER TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.0 KWh/24h
NET WEIGHT (APP.)	363 KG



### **PZ3600TN**

W×D×H (mm)	2020×800×1000
CAPACITY (LITERS)	580
COUNTER TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.2 KWh/24h
NET WEIGHT (APP.)	380 KG



## BAKERY REFR. COUNTER TN

### PA2100 TN

W×D×H (mm)	1510×800×860
CAPACITY (LITERS)	390
COUNTER TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.0 KWh/24h
NET WEIGHT (APP.)	130 KG



### PA3100 TN

W×D×H (mm)	2020×800×860
CAPACITY (LITERS)	580
COUNTER TEMP	-2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.2 KWh/24h
NET WEIGHT (APP.)	152 KG



### OPTIONS OF COUNTER:

- S/S IN ~~BACK~~  \_\_\_\_\_
- DEFROST BY HEATING ELEMENT  \_\_\_\_\_
- EACH GLASS DOOR FOR COUNTER  \_\_\_\_\_
- COUNTER ~~IN~~  \_\_\_\_\_
- COUNTER ~~IN~~  \_\_\_\_\_
- CASE ~~DOORS~~  \_\_\_\_\_

## SALADETTE SERIES GN 1/1

### S900

W×D×H (mm)	900×700×850
CAPACITY (LITERS)	240
TEMPERATURE	+2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	2.2 KWh/24h
NET WEIGHT (APP.)	70 KG



### S901

W×D×H (mm)	900×700×850
CAPACITY (LITERS)	240
TEMPERATURE	+2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	2.0 KWh/24h
NET WEIGHT (APP.)	72 KG



### S901 2D

W×D×H (mm)	900×700×850
CAPACITY (LITERS)	240
TEMPERATURE	+2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	2.0 KWh/24h
NET WEIGHT (APP.)	76 KG



### S901 4D

W×D×H (mm)	900×700×850
CAPACITY (LITERS)	240
TEMPERATURE	+2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	2.0 KWh/24h
NET WEIGHT (APP.)	80 KG



## SALADETTE SERIES GN 1/1

### PS900

W×D×H (mm)	900×700×1075
CAPACITY (LITERS)	288
TEMPERATURE	+2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	2.2 KWh/24h
NET WEIGHT (APP.)	92 KG



### S902

W×D×H (mm)	1045×700×850
CAPACITY (LITERS)	240
TEMPERATURE	+2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	2.5 KWh/24h
NET WEIGHT (APP.)	83 KG



### S903

W×D×H (mm)	1365×700×850
CAPACITY (LITERS)	368
TEMPERATURE	+2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.0 KWh/24h
NET WEIGHT (APP.)	107 KG



### S903 TOP S/S

W×D×H (mm)	1365×700×850
CAPACITY (LITERS)	368
TEMPERATURE	+2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	2.8 KWh/24h
NET WEIGHT (APP.)	110 KG



## SALADETTE SERIES GN 1/1

### PS200

W×D×H (mm)	900×700×970
CAPACITY (LITERS)	256
TEMPERATURE	+2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	2.2 KWh/24h
NET WEIGHT (APP.)	85 KG



### PS300

W×D×H (mm)	1365×700×970
CAPACITY (LITERS)	392
TEMPERATURE	+2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	3.0 KWh/24h
NET WEIGHT (APP.)	120 KG



### SA45 TN

W×D×H (mm)	900×700×850
CAPACITY (LITERS)	240
TEMPERATURE	+2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	2.0 KWh/24h
NET WEIGHT (APP.)	74 KG



### SS45 TN

W×D×H (mm)	900×700×850
CAPACITY (LITERS)	240
TEMPERATURE	+2 ~ +8 °C
POWER SUPPLY	230V/50HZ
POWER CONSUME	1.8 KWh/24h
NET WEIGHT (APP.)	72 KG



## VRX SERIES


THE CONDENSING UNIT CAN BE LEFT OR RIGHT

### VRX SERIES 330



NORMAL GLASS

CURVED GLASS

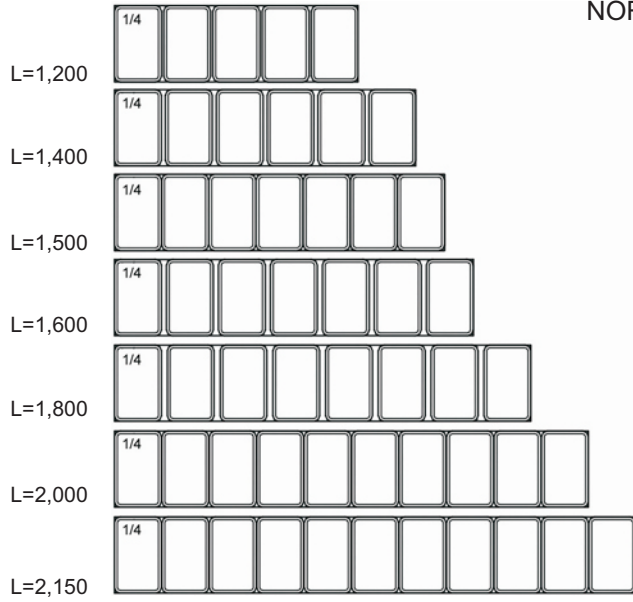

### VRX SERIES 380



NORMAL GLASS

CURVED GLASS

